


E-005 PLC DIGITAL INPUTS

Conv_Simple / CV-101 (garage conveyor) — Micro820 2080-LC20-20QBB embedded DI (24 VDC)

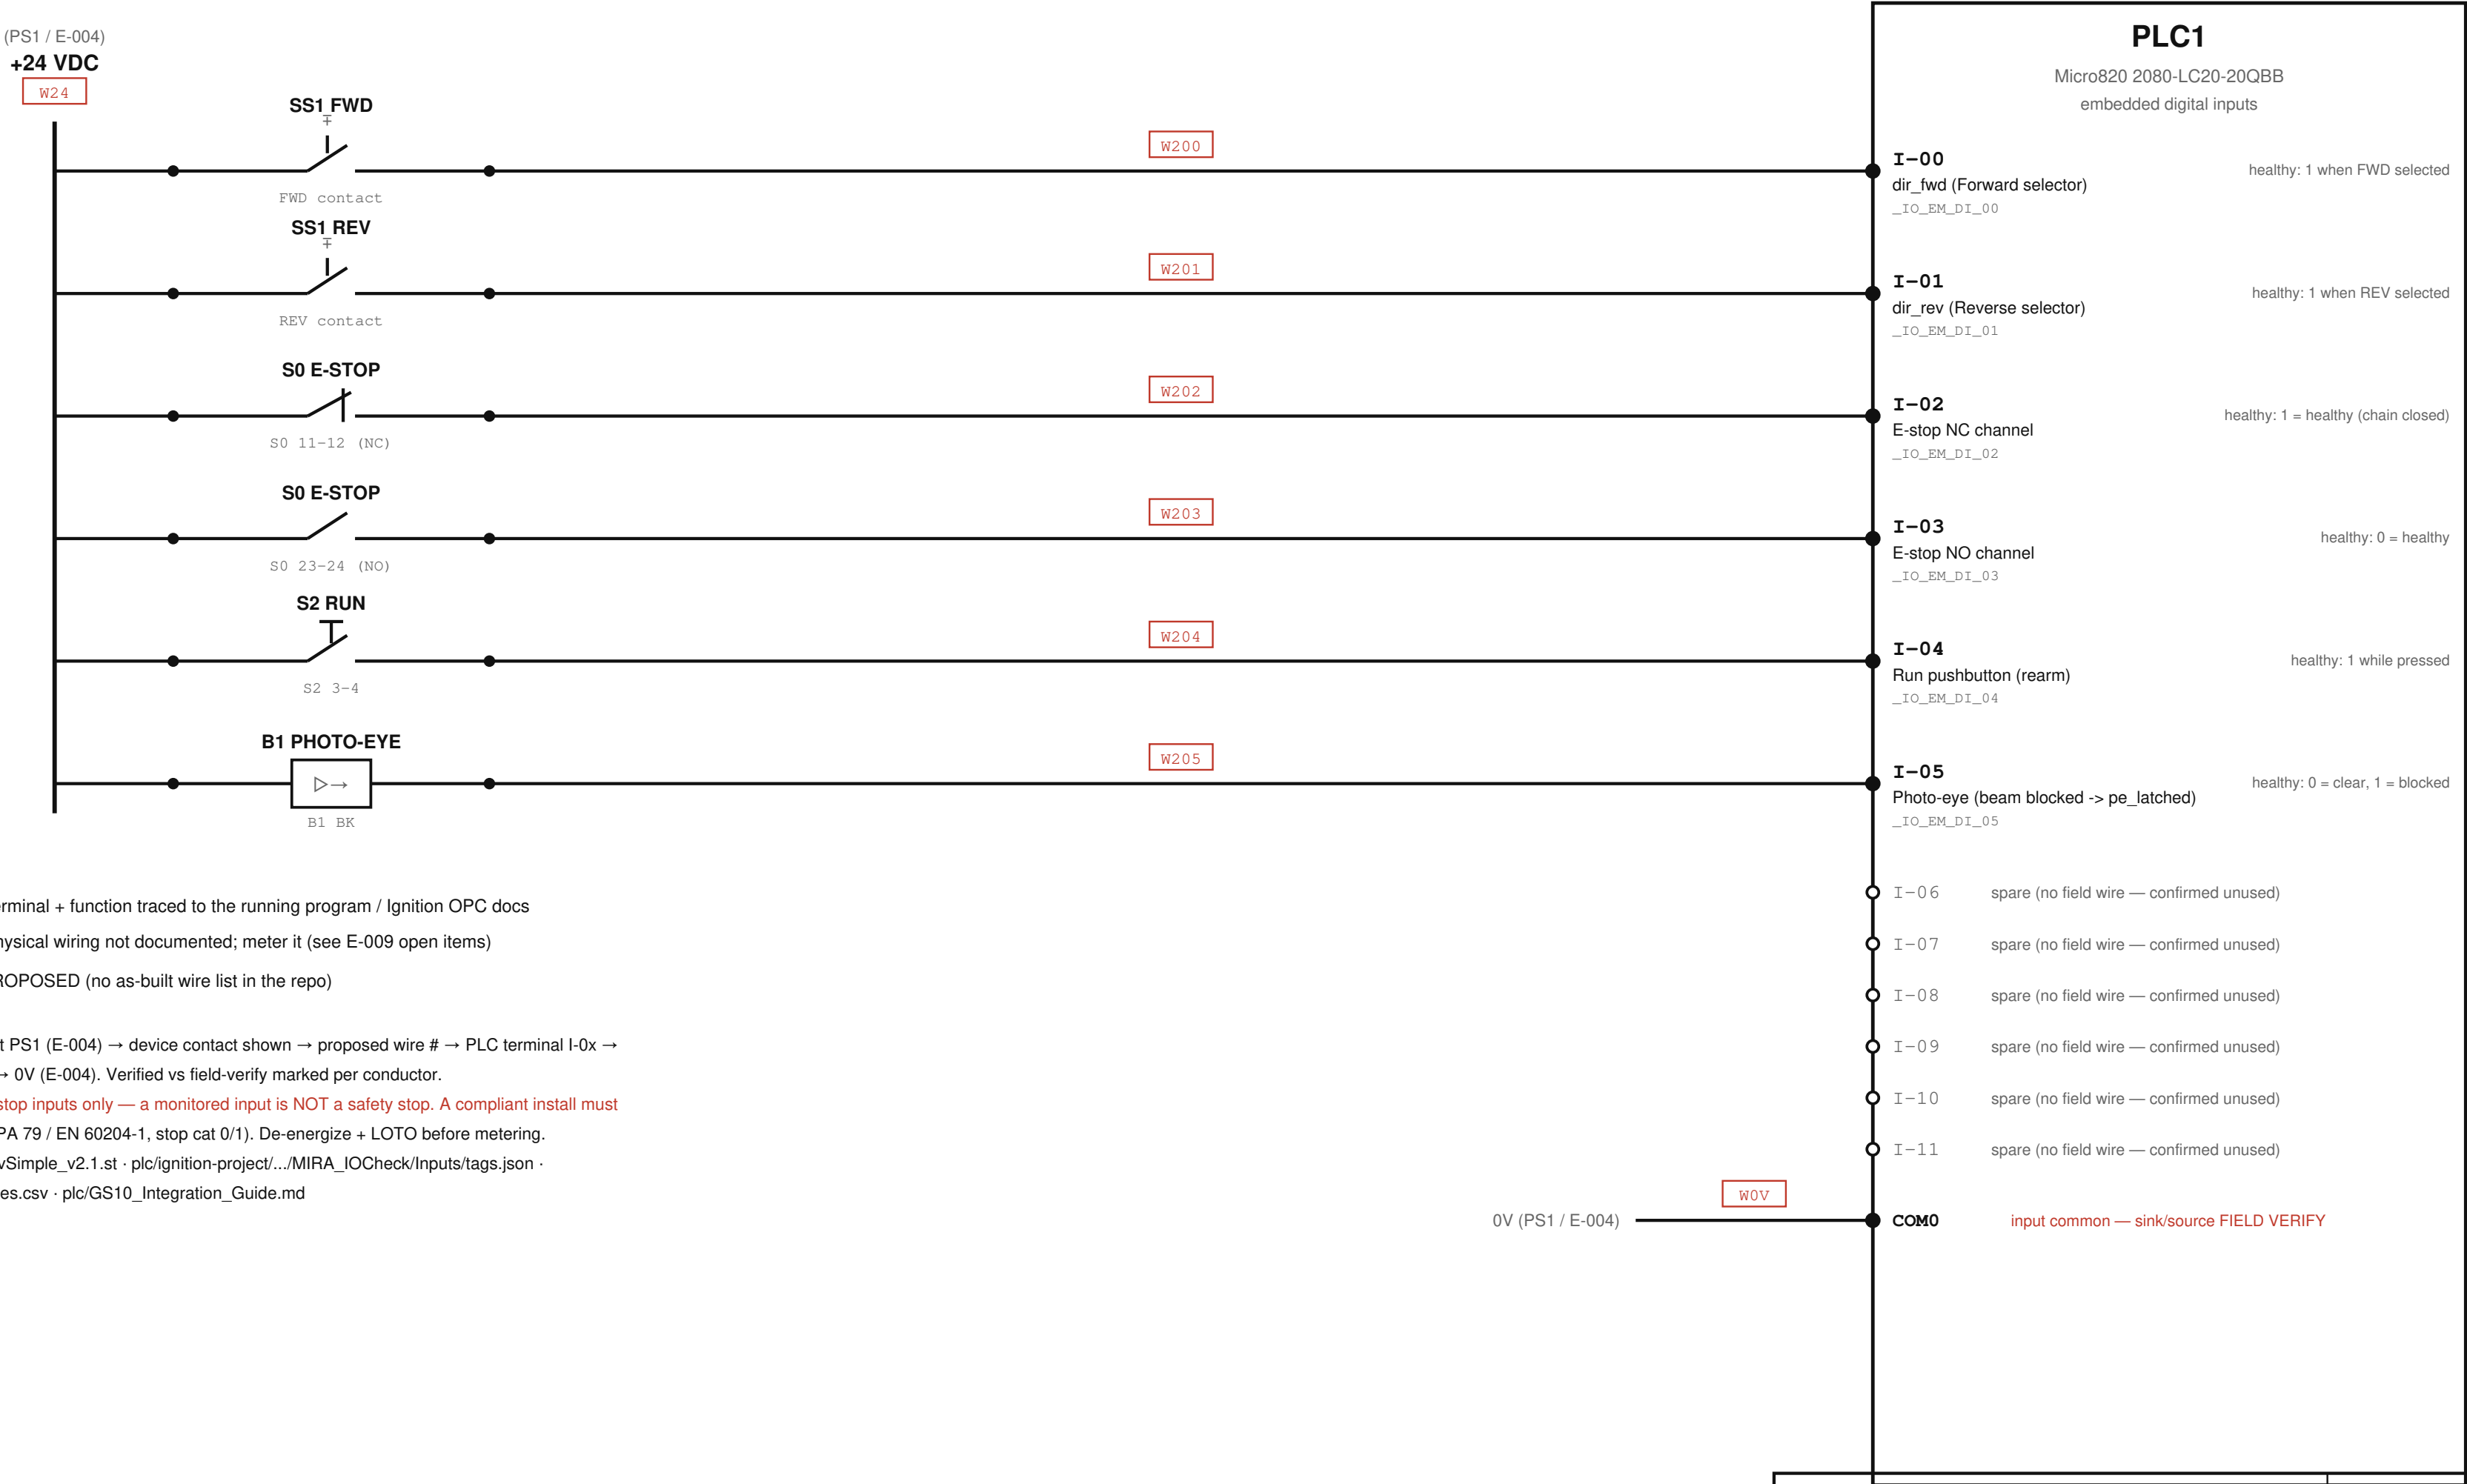

LEGEND

VERIFIED — PLC terminal + function traced to the running program / Ignition OPC docs

FIELD VERIFY — physical wiring not documented; meter it (see E-009 open items)

Wxxx wire numbers are PROPOSED (no as-built wire list in the repo)

READS (acceptance): +24 VDC starts at PS1 (E-004) → device contact shown → proposed wire # → PLC terminal I-0x → function/OPC tag → returns via COM0 → 0V (E-004). Verified vs field-verify marked per conductor.

SAFETY: I-02/I-03 are MONITORED e-stop inputs only — a monitored input is NOT a safety stop. A compliant install must hardwire S0 to remove drive power (NFPA 79 / EN 60204-1, stop cat 0/1). De-energize + LOTO before metering.

SOURCES (verified): plc/Prog_init_ConvSimple_v2.1.st · plc/ignition-project/.../MIRA_IOCheck/Inputs/tags.json · plc/ccw/controller/Controller/LogicalValues.csv · plc/GS10_Integration_Guide.md

PLC DIGITAL INPUTS

Conv_Simple / CV-101 (garage conveyor)

MIRA / FactoryLM

Drawn: MIRA / FactoryLM

SHEET

E-005

REV A

2026-07-03

5 of 9